

# VS182/VS184

## 2/4-Port HDMI Splitter

- The VS182 / VS184 HDMI Splitter is the perfect solution for anyone who needs to send one source of digital high-definition video to two (VS182) or four (VS184) displays at the same time. It supports all HDMI-enabled equipment, such as DVD players, satellite set-top boxes and all HDMI displays.

The VS182 / VS184 HDMI Splitter is HDCP (High Bandwidth Digital Content Protection) compliant, making it effective for use with all HDMI displays in home theater applications, as well as in corporate, educational and commercial settings.

**HDMI™**  
HIGH DEFINITION MULTIMEDIA INTERFACE




Maintains High-Definition Resolution up to 1080p!



### Features

- Connects one HDMI A/V source to two (VS182) or four (VS184) HDMI displays at the same time
- Superior video quality – HDTV resolution of 480p, 720p, 1080i and 1080p (1920x1080); VGA, SVGA, SXGA, UXGA (1600x1200), WUXGA (1920x1200)
- Cascade distance: Source to Device -1.8m, Device to Device-15m, Device to Display-20m
- HDMI (Deep color)
- Supports Dolby True HD and DTS HD Master Audio
- Cascadable to 3 levels - provides up to 8 / 64 HDMI signals.
- Long distance transmission – 20 m (24 AWG)
- DDC compatible
- HDMI and HDCP 1.1 compatible
- Signaling rates up to 2.25Gbits in support of 1080p display
- All-metal casing
- LED indication of display devices
- Plug-and-play – no software installation required
- Easy and affordable way to take your home theater system to the next level, or upgrade presentations, training, and video broadcasts in a corporate, educational, or commercial setting.

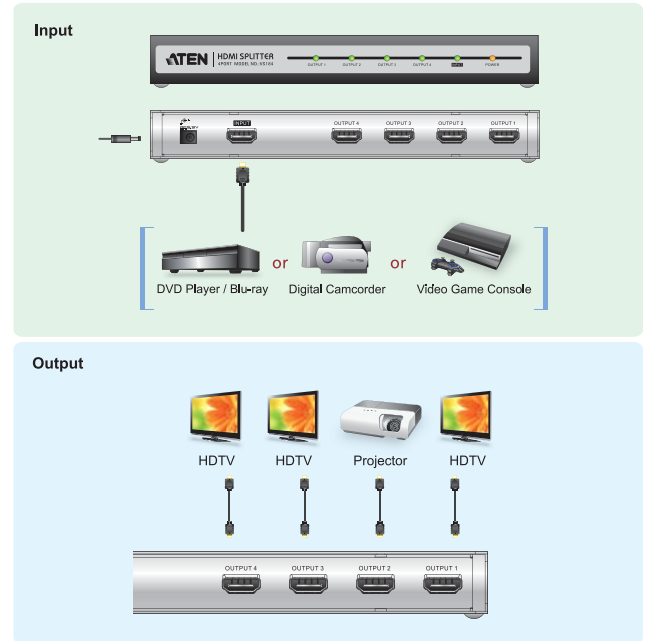

### Specification

Function			VS182	VS184
Display Connections			2	4
Connectors	Device	HDMI In	1 x HDMI Type A Female (Black)	1 x HDMI Type A Female (Black)
	Display	HDMI Out	2 x HDMI Type A Female (Black)	4 x HDMI Type A Female (Black)
	Power Jack		1 x DC Jack	
LEDs	Power		1 (Orange)	
	Input		1 (Green)	
	Output 1		1 (Green)	
	Output 2		1 (Green)	
	Output 3		N/A	1 (Green)
Output 4		N/A	1 (Green)	
HDMI Resolution			HDTV resolutions up to 1080p, computer resolutions up to WUXGA(1920x1200)	
Power Consumption			DC5.3V, 2.0W	DC5.3V, 4.6W
Environment	Operating Temp.		0-50°C	
	Storage Temp.		-20°C-60°C	
	Humidity		0-80% RH, Non-condensing	
Physical Properties	Housing		Metal	
	Weight		0.31 kg	0.47 kg
	Dimensions (LxW xH)		12.50 x 8.00 x 2.50 cm	20.00 x 8.00 x 2.50 cm

\* Product specifications and appearance are subject to change without notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com

Printed 05/2014 V8.0



© Copyright 2014 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their respective owners.