



SonicWall Gen 7 NSsp Series

The SonicWall Network Security services platform[™] (NS*sp*) series has next-generation firewalls with high port density and multi-gig speed interfaces, that can process several million connections for zero-day and advanced threats. Designed for large enterprise, higher education, government agencies and MSSPs, it eliminates attacks in real time without slowing performance. It is designed to be highly reliable and deliver uninterrupted services to organizations.

NSsp Spec Preview. View full specs »

100 GbE

Up to 100 Gbps

Ports

Firewall inspection throughput

Max Connections (NS*sp* 15700)

80M

HIGHLIGHTS

SonicWall NSsp Series

- High port density
- 100 GbE ports
- Integrates with on-prem and cloud-based sandboxing
- Single pane of glass management
- 80+ Gbps Threat prevention throughput
- Redundant power
- Up to 100 Gbps firewall inspection throughput
- TLS 1.3 support
- Supports millions of simultaneous TLS connections
- Low TCO

Learn more about SonicWall Gen 7 NS*sp* Series:

sonicwall.com/NSsp

DATASHEET

Enterprise-Class Firewalls

As businesses evolve along with an increase in managed and unmanaged devices, networks, cloud workloads, SaaS applications, users, Internet speeds, and encrypted connections, a firewall that can't support any one of these becomes a bottleneck. A firewall should be a source of strength and not a point of weakness.

The SonicWall NS*sp* firewall's multiple 100G/40G/25G/10G interfaces allow you to process several million simultaneous encrypted and unencrypted connections with unparallel threat prevention technology. With more than 70% of all sessions being encrypted, having a firewall that can process and examine this traffic without impacting the end user experience is critical to productivity and information security. The NS*sp*'s unified policy enables organizations to simply and intuitively create access and security policies in a single interface.

Simplified management and reporting

Ongoing management, monitoring and reporting of network activities are handled through the SonicWall Network Security Manager. This provides an intuitive dashboard for managing firewall operations as well as provide historical reports – from a single source. Together, the simplified deployment and setup along with the ease of management enable organizations to lower their total cost of ownership and realize a high return on investment.

Deployment

Next-Generation Firewall (NGFW)

- Managed through a single pane of glass
- NS*sp* integrates with the rest of the SonicWall ecosystem of solutions
- Gain full visibility into your network to see what applications, devices, and users are doing to enforce policies as well as eliminate threats and bandwidth bottlenecks
- Integrate with Capture ATP with RTDMI for cloud-based sandboxing or Capture Security appliance for on-premise malware detection

Deep Packet Inspection of SSL/ TLS (DPI-SSL) for hidden threats

- The NSsp provides inspection for over millions of simultaneous TLS/SSL and SSH encrypted connections regardless of port or protocol
- Inclusion and exclusion rules allow customization based on specific organizational compliance and/or legal requirements
- Support for TLS cipher suites up to TLS 1.3

Segmentation and Networking

 Operate across several segmented networks, clouds, or service definitions, with unique templates, device groups, and policies across multiple devices and tenants • MSSPs can also support multiple customers with a clean pipe along with unique policies

Multi-instance Firewall (only for NS*sp* 15700)

- Multi-instance is the next generation of multi-tenancy
- Each tenant is isolated with dedicated compute resources to avoid resource starvation
- It features physical and logical ports/tenants
- It supports independent tenant policy and configuration management
- Leverage version independence and High Availability (HA) support for tenants

Wire Mode Functionality

- Bypass Mode for the quick and relatively non-interruptive introduction of firewall hardware into a network
- Inspect Mode to extend Bypass Mode without functionally altering the low-risk, zero latency packet path
- Secure Mode to actively interposing the firewall's multi-core processors into the packet processing path
- Tap Mode to ingest a mirrored packet stream via a single switch port on the firewall, eliminating the need for physically intermediated insertion

Advanced Threat Protection

- SonicWall Capture Advanced Threat Protection™ (ATP) is used by over 150,000 customers across the world through a variety of solutions and it helps to discover and stop over 1,200 new forms of malware each business day
- NSsp integrates with Capture Security appliance to detect and block unknown threats with on-premises sandboxing thats uses Real-Time Deep Memory Inspection™ (RTDMI).

Capture Cloud Platform

 SonicWall's Capture Cloud Platform delivers cloud-based threat prevention and network management plus reporting and analytics for organizations of any size

Content Filtering Services

- Compare requested web sites against a massive database in the cloud containing millions of rated URLs, IP addresses and web sites
- Create and apply policies that allow or deny access to sites based on individual or group identity, or by time of day, for over 50 pre-defined categories




Intrusion Prevention System (IPS)


- Delivers a configurable, high performance Deep Packet Inspection engine for extended protection of key network services such as Web, e-mail, file transfer, Windows services and DNS
- Designed to protect against application vulnerabilities as well as worms, trojans, and peer-to-peer, spyware and backdoor exploits
- The extensible signature language provides proactive defense against newly discovered application and protocol vulnerabilities
- SonicWall IPS offloads the costly and time-consuming burden of maintaining and updating signatures for new attacks through SonicWall's industryleading Distributed Enforcement Architecture (DEA)

IoT and Application Control

 The NSsp catalogs thousands of applications through App Control and monitors their traffic for anomalous behavior

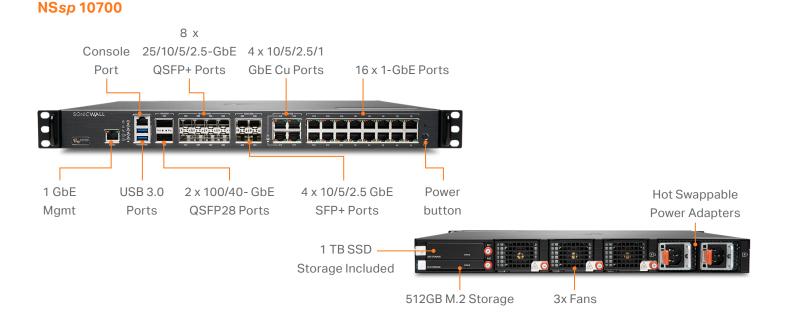



NS*sp* 11700

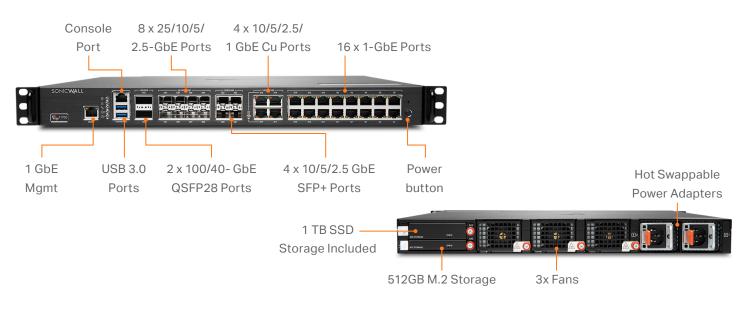

SONICWALL

NSsp 13700

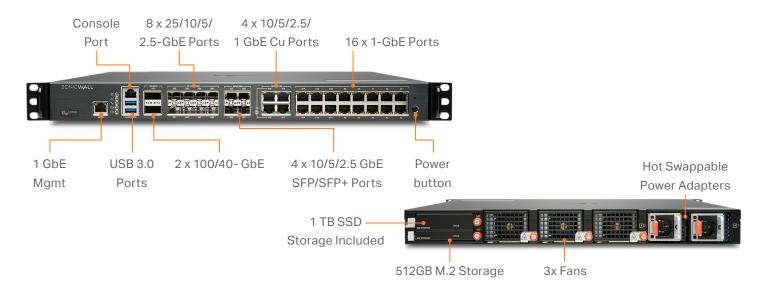

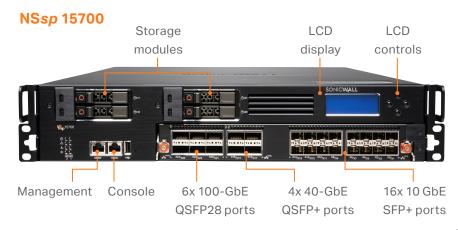



10x fans

Hot Swappable Power Adapters



SonicWall NSsp Series specifications

Firewall General	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700
Operating System	SonicOS 7.0.1	SonicOS 7.0.1	SonicOS 7.0.1	SonicOSX 7.0
Interfaces	2x100G; 8x25G, 4x10G/5G/2.5G/1G (SFP+), 4 x 10G/5G/2.5G/1G (Cu); 16 x 1GbE (Cu) 2 USB 3.0, 1 Console, 1 Mgmt. port	2x100G; 8x25G, 4x10G/5G/2.5G/1G (SFP+), 4 x 10G/5G/2.5G/1G (Cu); 16 x 1GbE (Cu) 2 USB 3.0, 1 Console, 1 Mgmt. port	2x100/40-GbE QSFP28, 8x25/10/5/2.5-GbE SFP28, 4x10/5/2.5-GbE SFP+, 4x10/5/2.5/1-GbE Cu, 16x1-GbE 2 USB 3.0, 1 Console, 1 Mgmt. port	6 x 100-GbE QSFP28, 4 x 40-GbE QSFP+, 16 x 10 GbE SFP+
Total storage	1.5TB	1.5TB	1.5TB	2 x 480 GB SSD
Management	CLI, SSH, Web UI, REST APIs			
SSO Users	100,000			
Access points supported (maximum)	512	512	512	512
Logging	Analyzer, Local Log, Syslog, IPFIX, NetFlow			

Firewall/VPN Performance	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NSsp 13700	NS <i>sp</i> 15700
Firewall inspection throughput ¹	42 Gbps	47 Gbps	60 Gbps	105 Gbps
Threat Prevention throughput ²	27 Gbps	35 Gbps	45.5 Gbps	82 Gbps
Application inspection throughput ²	30 Gbps	44 Gbps	57 Gbps	86 Gbps
IPS throughput ²	28 Gbps	37 Gbps	48 Gbps	76.5 Gbps
TLS/SSL inspection and decryption throughput (DPI SSL) ²	10 Gbps	11.5 Gbps	16.5 Gbps	21 Gbps
VPN throughput ³	22.5 Gbps	26.7 Gbps	29 Gbps	32 Gbps
Connections per second	280,000	280,000	280,000	800,000
Maximum connections (SPI)	15,000,000	20,000,000	25,000,000	80,000,000
Maximum connections (DPI)	12,000,000	17,000,000	22,000,000	50,000,000
Maximum connections (DPI SSL)	1,500,000	1,750,000	2,000,000	3,000,000

VPN	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700
Site-to-site VPN tunnels	6,000	12,000	12,000	25,000
IPSec VPN clients (max)	2000 (6000)	2000 (6000)	2,000 (6,000)	2,000 (10,000)
SSL VPN licenses (max)	2 (3000)			
Encryption/authentication	DES, 3DES, AES (128, 192, 256-bit)/MD5, SHA (1,256,384,512) Suite B Cryptography		DES, 3DES, AES (128, 192, 256-bit)/MD5, SHA-1, Suite B Cryptography	
Key exchange	Diffie Hellman Groups 1, 2, 5, 14v			
Route-based VPN	RIP, OSPF, BGP			
Certificate support	Verisign, Thawte, Cybertrust, RSA Keon, Entrust and Microsoft CA for SonicWall-to- SonicWall VPN, SCEP			
VPN features	Dead Peer Detection, DHCP Over VPN, IPSec NAT Traversal, Redundant VPN Gateway, Route-based VPN			
Global VPN client platforms supported	Microsoft® Windows Vista 32/64-bit, Windows 7 32/64-bit, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Windows 10			
NetExtender	Microsoft Windows Vista 32/64-bit, Windows 7, Windows 8.0 32/64-bit, Windows 8.1 32/64-bit, Mac OS X 10.4+, Linux FC3+/Ubuntu 7+/OpenSUSE			
Mobile Connect	Apple® iOS, Mac OS X, Google® Android™, Kindle Fire, Chrome, Windows 8.1 (Embedded)			
Networking	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700
Multi-Instance Firewall	N/A	N/A	N/A	Max Tenants per Hardware: 12
IP address assignment	Static (DHCP, PPPoE, L2TP and PPTP client), Internal DHCP server, DHCP Relay			



SonicWall NSsp Series specifications

Networking	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700	
NAT modes	1:1, mar	y:1, 1:many, flexible NAT (ov	erlapping IP), PAT, transpar	ent mode	
Logical VLAN and tunnel interfaces (maximum)	1024				
Wire Mode	-	-	-	Yes	
Routing protocols	BGP4, OSPF, RIPv1/ v2, static routes, policy-based routing	BGP4, OSPF, RIPv1/ v2, static routes, policy-based routing	BGP4, OSPF, RIPv1/ v2, static routes, policy-based routing	BGP, OSPF, RIPv1/ v2, static routes, policy-based routing	
QoS	Bandwidth priori	ty, max bandwidth, guarante	ed bandwidth, DSCP mark	ing, 802.1e (WMM)	
Authentication	LDAP (multiple domains), XAUTH/RADIUS, TACACS+, SSO, Radius accounting NTLM, internal user database, 2FA, Terminal Services, Citrix, Common Access Card (CAC)		LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database, Terminal Services, Citrix, Common Access Card (CAC)		
Local user database	4,000	4,000	4,000	5,000	
VoIP		Full H323	-v1-5, SIP		
Standards	TCP/IP, UDP, ICMP, HTTP, HTTPS, IPSec, ISAKMP/IKE, SNMP, DHCP, PPPoE, L2TP, PPTP, RADIUS, IEEE 802.3				
Certifications (in progress)	FIPS 140-2 (with Suite B), UC APL, IPv6 (Phase 2), ICSA Network Firewall, ICSA Anti-virus, Common Criteria NDPP (Firewall and IPS)		FIPS 140-2 (with Suite B) Level 2, UC APL, VPNC, IPv6 (Phase 2), ICSA Network Firewall, ICSA Anti-virus, Common Criteria NDPP (Firewall and IPS)		
High availability	Active/Passive with stateful synchronization				
Hardware	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700	
Power supply	2x350W	2x350W	2x350W	Dual, Redundant, 1,200W	
Fans	3 (removable)	3 (removable)	3 (removable)	10	
Redundant Power Supply		100-240 VA	.C, 50-60 Hz		
Maximum power consumption (W)	155.3	155.3	181.2	1135.0	
Total heat dissipation	529.57 BTU	529.57 BTU	617.89 BTU	3870.35 BTU	
Form factor	1U Rack Mountable	1U Rack Mountable	1U Rack Mountable	2U Rack Mountable	
Dimensions	43 x 32.5 x 4.5 (cm) 16.9 x 12.8 x 1.8 in	43 x 32.5 x 4.5 (cm) 16.9 x 12.8 x 1.8 in	43 x 32.5 x 4.5 (cm) 16.9 x 12.8 x 1.8 in	68.6 x 43.8 x 8.8 (cm)	
Weight	9.1 Kg	9.1 Kg	9.1 Kg	26 Kg	
WEEE weight	11 Kg	11 Kg	11 Kg	30.1 Kg	
Shipping weight	14.9 Kg	14.9 Kg	14.9 Kg	37.3 Kg	
Environment (Operating/Storage)		32°-105° F (0°-40° C)/-40	° to 158° F (-40° to 70° C)		
Humidity	0-90% R.H non-condensing	0-90% R.H non-condensing	0-90% R.H non-condensing	10-95% non-condensing	
Regulatory	NS <i>sp</i> 10700	NS <i>sp</i> 11700	NS <i>sp</i> 13700	NS <i>sp</i> 15700	
Regulatory model numbers	1RK54-118	1RK54-119	1RK54-118	2RK05-0FE	
Major Regulatory	FCC Class A, CE (EMC, LVD, RoHS), C-Tick, VCCI Class A, MSIP/KCC Class A, UL, cUL, TUV/ GS, CB, Mexico CoC by UL, WEEE , REACH, ANATEL, BSMI	FCC Class A, CE (EMC, LVD, RoHS), C-Tick,	FCC Class A, CE (EMC, LVD, RoHS), C-Tick, VCCI Class A, MSIP/KCC Class A, UL, cUL, TUV/ GS, CB, Mexico CoC by UL, WEEE , REACH, ANATEL, BSMI	FCC Class A, ICES Class A, CE (EMC Class A, LVD, RoHS), C-Tick, VCCI Class A, MSIP/ KCC Class A, UL, cUL, TUV/GS, CB, Mexico UL DGN notification, WEEE, REACH, ANATEL, BSMI	
Testing Methodologies: Maximum performat based on RFC 2544 (for firewall). Actual perfor may vary depending on network conditions and activated services.	ormance throughput m Keysight HTT with multiple f Prevention th	tion/GatewayAV/Anti-Spyware/IPS easured using industry standard P performance test tools. Testing c lows through multiple port pairs. Th roughput measured with Gateway / ,IPS and Application Control enable	1418 byte packet si lone adhering to RFC 25- ireat and availability are s	easured with UDP traffic using ze AESGMAC16-256 Encryptio 44. All specifications, features subject to change.	



SonicOSX and SonicOS feature summary

Firewall

- Stateful packet inspection
- Reassembly-Free Deep
 Packet Inspection
- DDoS attack protection (UDP/ ICMP/SYN flood)
- IPv4/IPv6 support
- Biometric authentication for remote access
- DNS proxy
- REST APIs
- SonicWall Switch integration

Unified Security Policy

- Unified Policy combines Layer 4 to Layer 7 rules:
- Source/Destination IP/Port/Service
- Application Control
- CFS/Web Filtering
- Single Pass Security Services enforcement
- IPS/GAV/AS/Capture ATP
- Rule management:
 - Cloning
 - Shadow rule analysis
 - In-cell editing
 - Group editing
- Managing views
 - Used/un-used rules
 - Active/in-active rules
 - Sections

TLS/SSL/SSH decryption and inspection

- TLS 1.3
- Deep packet inspection for TLS/SSL/SSH
- Inclusion/exclusion of objects, groups or hostnames
- SSL control
- Granular DPI-SSL controls
 per zone or rule
- Decryption Policies for SSL/TLS and SSH

Capture advanced threat protection¹

- Real-Time Deep Memory Inspection
- Cloud-based multi-engine analysis

SonicWall Gen 7 NSsp Series

Virtualized sandboxing

7

Hypervisor level analysis

- Full system emulation
- Broad file type examination
- Automated and manual submission
- Real-time threat intelligence updates
- Block until verdict
- Capture Client integration

Intrusion prevention¹

- Signature-based scanning
- Automatic signature updates
- Bi-directional inspection
- Granular IPS rule capability
- GeoIP enforcement
- Botnet filtering with dynamic list
- Regular expression matching

Anti-malware¹

- Stream-based malware scanning
- Gateway antivirus
- Gateway anti-spyware
- Bi-directional inspection
- No file size limitation
- Cloud malware database

Application identification¹

- Application control
- Application bandwidth management
- Custom application signature creation
- Data leakage prevention
- Application reporting
 over NetFlow/IPFIX
- Comprehensive application signature database

Traffic visualization and analytics

- User activity
- Application/bandwidth/threat usage
- Cloud-based analytics

HTTP/HTTPS Web content filtering¹

- URL filtering
- Proxy avoidance
- Keyword blocking
- Policy-based filtering (exclusion/inclusion)
- HTTP header insertion
- Bandwidth manage CFS
 rating categories
- Content Filtering Client

VPN

- Auto-provision VPN
- IPSec VPN for site-to-site connectivity
- SSL VPN and IPSec client remote access
- Redundant VPN gateway
- Mobile Connect for iOS, Mac OS X, Windows, Chrome, Android and Kindle Fire
- Route-based VPN (OSPF, RIP, BGP)

Networking

- Multi-instance firewall (only on NSsp 15700)
- PortShield
- Jumbo frames
- Path MTU discovery
- Enhanced logging
- VLAN trunking
- Port mirroring
- Layer-2 QoS
- Port security
- Dynamic routing (RIP/OSPF/BGP)

Link aggregation (static and dynamic)

A/P high availability with state sync

Inbound/outbound load balancing

High availability - Active/Standby

Wire/virtual wire mode, tap

- Policy-based routing (ToS/ metric and ECMP)
- NAT

•

•

•

VoIP

- DHCP server
- Bandwidth management

Port redundancy

with state sync

mode, NAT mode

Asymmetric routing

Granular QoS control

DPI for VoIP traffic

SIP proxy support

Web GUI

Rest API

Bandwidth management

H.323 gatekeeper and

Management and monitoring

Command line interface (CLI)

Zero-Touch registration & provisioning

SONICWALL

SonicExpress mobile app support

Management and monitoring cont'd

- SNMPv2/v3
- Centralized management and reporting with SonicWall Network Security Manager (NSM)¹
- Logging
- Netflow/IPFix exporting
- Cloud-based configuration backup
- Application and bandwidth visualization
- IPv4 and IPv6 management

¹ Requires added subscription



Find the right SonicWall firewall for your enterprise

www.sonicwall.com/firewalls

About SonicWall

SonicWall delivers Boundless Cybersecurity for the hyper-distributed era and a work reality where everyone is remote, mobile and unsecure. By knowing the unknown, providing real-time visibility and enabling breakthrough economics, SonicWall closes the cybersecurity business gap for enterprises, governments and SMBs worldwide. For more information, visit www.sonicwall.com.



SONICWALL

SonicWall, Inc. 1033 McCarthy Boulevard | Milpitas, CA 95035 Refer to our website for additional information. www.sonicwall.com

© 2022 SonicWall Inc. ALL RIGHTS RESERVED.

SonicWall is a trademark or registered trademark of SonicWall Inc. and/or its affiliates in the U.S.A. and/or other countries. All other trademarks and registered trademarks are property of their respective owners. The information in this document is provided in connection with SonicWall Inc. and/or its affiliates' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of SonicWall products. Except as set forth in the terms and conditions as specified in the license agreement for this product. SonicWall and/or its affiliates assume no liability whatsoever and disclaims any express, implied or statutory warranty relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or non- infringement. In no event shall SonicWall and/or its affiliates be liable for any direct, indirect, consequential, punitive, special or incidental damages (including, without limitation, damages for loss of profits, business interruption or loss of information) arising out of the use or inability to use this document, even if SonicWall and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. SonicWall Inc. and/or its affiliates do not make any commitment to update the information contained in this document.